

Axor is a part of the Televend ecosystem





The Televend ecosystem consists of the No.1 VMS in Europe and Televend Masterpiece, an award-winning smart machine controller that controls:

- TELEMETRY
- MEDIA MANAGEMENT
- PAYMENT & REFUNDS
- PROMOTIONS & ADVERTISING
- MACHINE COMPONENTS



Platform trusted by industry leaders

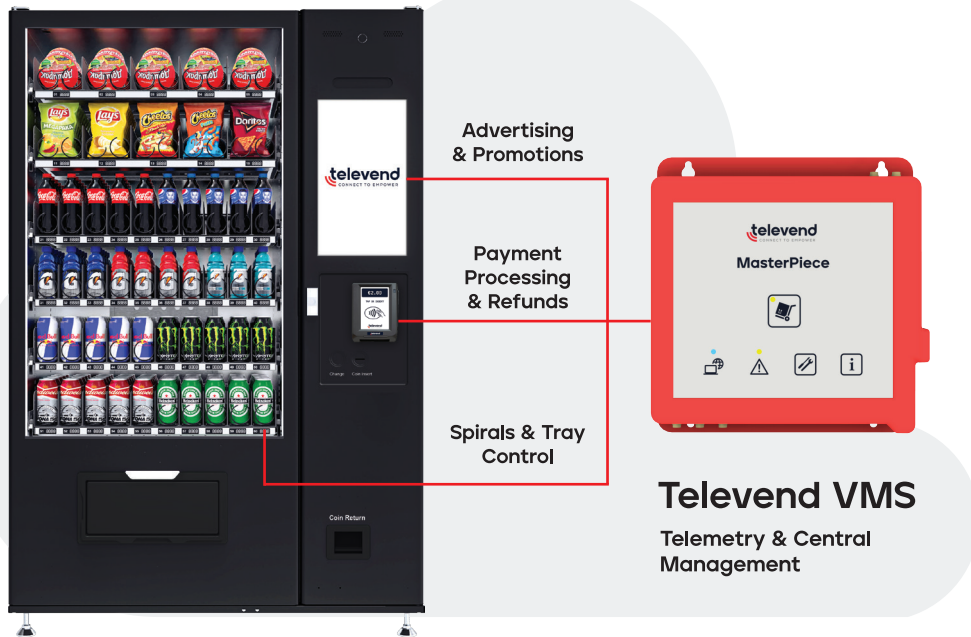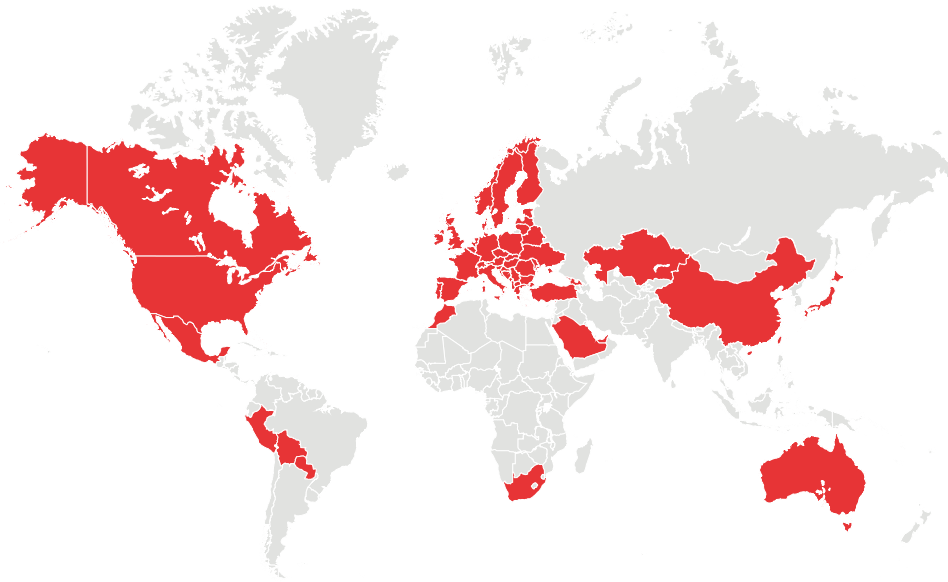

“Televend's Data analytics is an integral part of our success and they bring us rich data on a day-to-day basis.”

Dominic Donylal
HEAD OF VENDING & UNATTENDED RETAIL,
COCA COLA HELLENIC

“Televend has been very collaborative partner, even helping us rethink our operating procedures.”

Christophe Gillet
OPERATIONAL EXCELLENCE MANAGER,
SELECTA

- sales@televend.com
- televend.com
- Bani 73 a, 10000 Zagreb, Croatia
- +385 1 7890 800



AXOR Smart Machines

Unlock the potential of modern, interactive vending

POWERED BY TELEVEND MASTERPIECE






A49

Combo with Full Screen

Option: A49e | Combo with elevator

Advertising and promotions on 49" touchscreen with basket sales of drinks and snacks

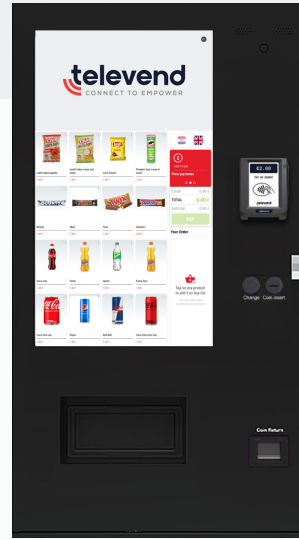

DIMENSIONS

H: 1940mm, W: 1009mm, D: 895mm

WEIGHT

320 KG

TOUCHSCREEN

49" (1078x609) Selection and Advertising Touchscreen

PRODUCT DISPENSER

Spirals (conveyor optional)

POWER

600 W

TRAYS

- 6 standard spiral trays, up to 8 available
- 8 spirals/tray (7 with lift system)
- 48 to 64 product selections available

VOLTAGE & MAXIMUM CURRENT

- AC110V ~ 120V/50Hz/6A
- AC220V ~ 240V/50/60Hz/3A

COOLANT

R290 Optional: R134a, R1234yf

PAYMENT PROTOCOLS

MDB, EXE, USB, CCTalk, RS232, Ethernet

COOLING UNIT REMOTE TEMP. CONTROL

Internal temperature range: 4°C – 21°C

AMBIENT TEMP. OPERATING RANGE

External temperature range: -5°C – 40°C

WARRANTY

24 months

CERTIFICATION

CE (EU), UKCA (UK) In process: UL (USA), ECAS (UAE), SASO (KSA)

OPTIONAL FEATURES


Lift dispensing system, Demographic module



A49ei

Frozen Food Machine

Advertising and promotions on 49" touchscreen with single vend frozen food delivery via elevator

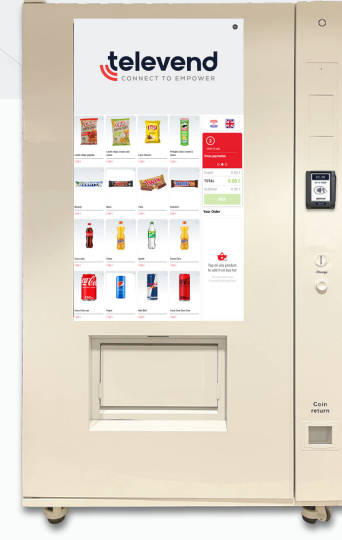

DIMENSIONS

H: 1960mm, W: 1163mm, D: 944mm

WEIGHT

470 KG

TOUCHSCREEN

49" (1078x609mm) Selection and Advertising Touchscreen

PRODUCT DISPENSER

Spirals (conveyor optional) with lift dispensing system

POWER

1200 W

TRAYS

- 5 standard spiral trays
- 9 spirals (8 conveyor) per tray
- 45 product selections

VOLTAGE & MAXIMUM CURRENT

- AC110V ~ 120V/50Hz/6A
- AC220V ~ 240V/50/60Hz/3A

COOLANT

R454C Optional: R404A

PAYMENT PROTOCOLS

MDB, EXE, USB, CCTalk, RS232, Ethernet

COOLING UNIT REMOTE TEMP. CONTROL

Internal temperature range: - 25°C

AMBIENT TEMP. OPERATING RANGE

External temperature range: -5°C – 40°C

WARRANTY

24 months

CERTIFICATION

CE (EU), UKCA (UK) In process: UL (USA), ECAS (UAE), SASO (KSA)

OPTIONAL FEATURES

Demographic module



A22

Combo with Glass Front

Advertising, promotions, and basket sales with a see-through glass and 22" display



DIMENSIONS

H: 1940mm, W: 1294mm, D: 870mm

WEIGHT

300 KG

TOUCHSCREEN

21.5" (480x260mm) Selection and Advertising Touchscreen

PRODUCT DISPENSER

Spirals (conveyor optional)

POWER

600 W

TRAYS

- 6 standard spiral trays
- 10 spirals per tray
- Up to 60 product selections

VOLTAGE & MAXIMUM CURRENT

- AC110V ~ 120V/50Hz/6A
- AC220V ~ 240V/50/60Hz/3A

COOLANT

R290 Optional: R134a, R1234yf

PAYMENT PROTOCOLS

MDB, EXE, USB, CCTalk, RS232, Ethernet

COOLING UNIT REMOTE TEMP. CONTROL

Internal temperature range: 4°C – 21°C

AMBIENT TEMP. OPERATING RANGE

External temperature range: -5°C – 40°C

WARRANTY

24 months

CERTIFICATION

CE (EU), UKCA (UK) In process: UL (USA), ECAS (UAE), SASO (KSA)

OPTIONAL FEATURES

Lift dispensing system, Demographic module